
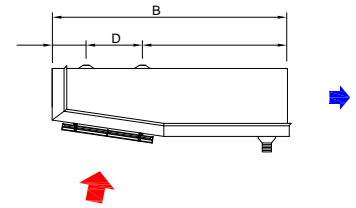


SD.H.20.2.08-4M-D

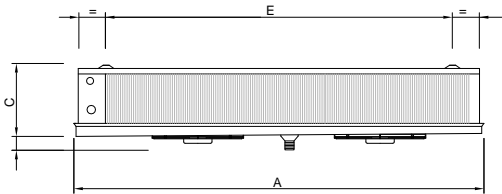

Capacity (kW) 1.03

Electric Defrost (kW) 0.9

AIR

Flow (m³/h) 490
 Temp.IN (°C) 0
 Air Throw (m) 4

EXCHANGER

FINS

Fins material AL
 Fin pitch (mm) 4
 Surface (m²) 4

FLUID

R404A
 Temp.Evap. (°C) -10

TUBES

Material CU
 Volume (dm³) 1.14

FANS

Nr. 2
 Diameter (mm) 200
 RPM (min⁻¹) 1200
 Supply line (V/P/Hz) 230/1/50
 Current (A) 2x0.46
 Capacity (W) 2x20

HEADERS

Material CU
 IN (SAE) 9,52
 OUT (mm) 9,52

DIMENSIONS

Length(A) (mm) 860
 Width(B) (mm) 440
 Height(H) (mm) 125
 Feet distance(E) (mm) 750
 Weight (kg) 9

NOISE

Pressure level (dB(A)) 40
 Distance (m) 5

Frost Factor Correction 6/24h