
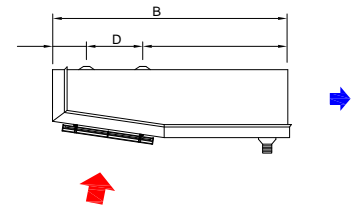


SD.H.20.3.04-4M-D

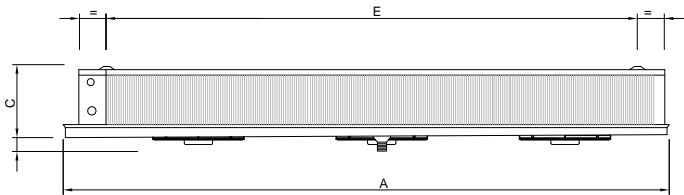

Capacity (kW)	1.35	Electric Defrost (kW)	1.1
---------------	------	-----------------------	-----

AIR

Flow (m ³ /h)	650
Temp.IN (°C)	0
Air Throw (m)	5

FLUID

	R404A
Temp.Evap. (°C)	-10

FANS

Nr.	3
Diameter (mm)	200
RPM (min ⁻¹)	1200
Supply line (V/P/Hz)	230/1/50
Current (A)	3x0.46
Capacity (W)	3x20

NOISE

Pressure level (dB(A))	41
Distance (m)	5

EXCHANGER

FINS

Fins material	AL
Fin pitch (mm)	4
Surface (m ²)	5.3

TUBES

Material	CU
Volume (dm ³)	1.5

HEADERS

Material	CU
IN (SAE)	9,52
OUT (mm)	9,52

DIMENSIONS

Length(A) (mm)	1110
Width(B) (mm)	440
Height(H) (mm)	125
Feet distance(E) (mm)	1000
Weight (kg)	13

Frost Factor Correction 6/24h