


SD.H.20.4.06-4M-D

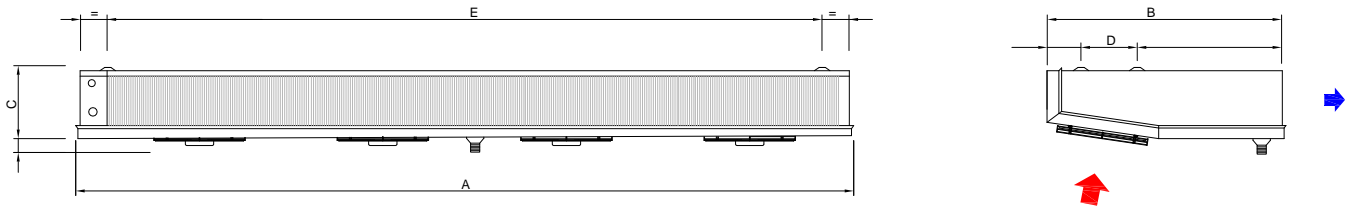

Capacity (kW)	1.88	Electric Defrost (kW)	1.2
---------------	------	-----------------------	-----

AIR

Flow (m ³ /h)	720
Temp.IN (°C)	0
Air Throw (m)	5

FLUID

	R404A
Temp.Evap. (°C)	-10

FANS

Nr.	4
Diameter (mm)	200
RPM (min ⁻¹)	1200
Supply line (V/P/Hz)	230/1/50
Current (A)	4x0.46
Capacity (W)	4x20

NOISE

Pressure level (dB(A))	42
Distance (m)	5

EXCHANGER

FINS

Fins material	AL
Fin pitch (mm)	4
Surface (m ²)	9.9

TUBES

Material	CU
Volume (dm ³)	2.8

HEADERS

Material	CU
IN (SAE)	12
OUT (mm)	16

DIMENSIONS

Length(A) (mm)	1360
Width(B) (mm)	440
Height(H) (mm)	125
Feet distance(E) (mm)	1230
Weight (kg)	19

Frost Factor Correction 6/24h