


Air inlet temperature	°C	0	Evaporating temperature	°C	-10,0
TD	°C	10,0	Refrigerant		R404A
Min number of units in room		1			

Heat exchanger	Standard	Casing	Standard
Motorfans feed	Standard	Fan motors	Standard
Defrost	Electric		

Selected model: 1 x CTE 29M6 ED

Capacity	kW	1,891			
TD	°C	10,0	Tot. air flow	m3/h	750

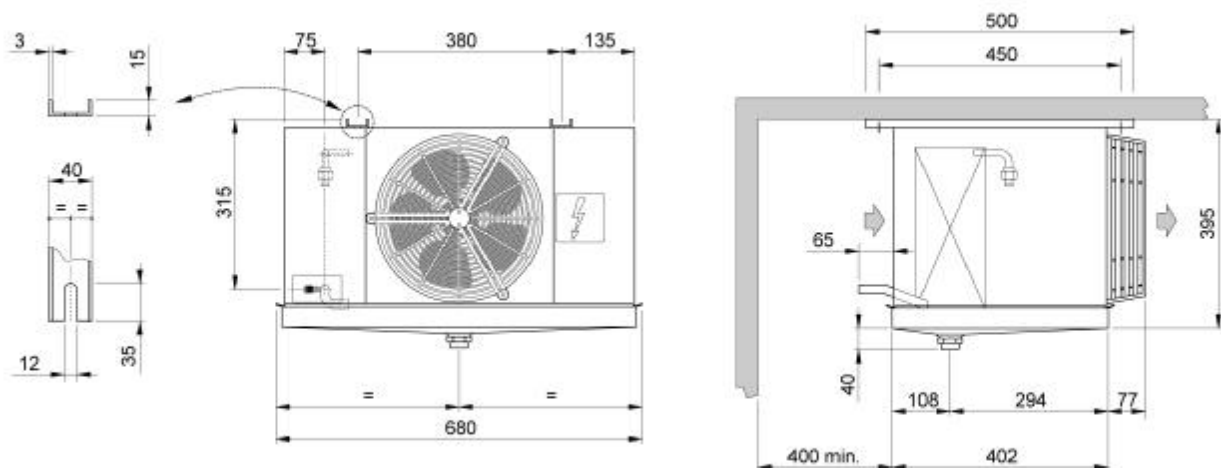

Weight	kg	17,400			
Internal surface	m2	1,06	External surface	m2	6,67
Input connection		1/2" SAE	Output connection		16 mm
Total circuit capacity	dm3	2,34	Fin spacing	mm	6
Drain connection		1" GAS			

Defrost	ED	Electric	Fan	Watt	750
Fan	n.	1	Diameter	mm	250
Air flow	m3/h	750	Air throw	m	7,5
Feed	V	230/1/50-60	Fan speed	rpm	1300
Fan	A	0,47	Total power	Watt	75
Tot. Pres.S.Lev. 10 m.	dB(A)	31			

N.B.: we shall not be liable for the performances and the quality of sold products, if fitted or connected to fan motor speed regulation or control systems that are different from the ones proposed or installed by us.