

User

Kubitech S.R.L.

Verification Unit cooler


vineri.17.03.2017

Air inlet temperature	°C	0	Evaporating temperature	°C	-10,0
TD	°C	10,0	Refrigerant		R404A
Min number of units in room		1			

Heat exchanger	Standard	Casing	Standard
Motorfans feed	Standard	Fan motors	Standard
Defrost	Electric		

Selected model: 1 x CTE 504B6 ED

Capacity	kW	69,000			
TD	°C	10,0	Tot. air flow	m3/h	26980

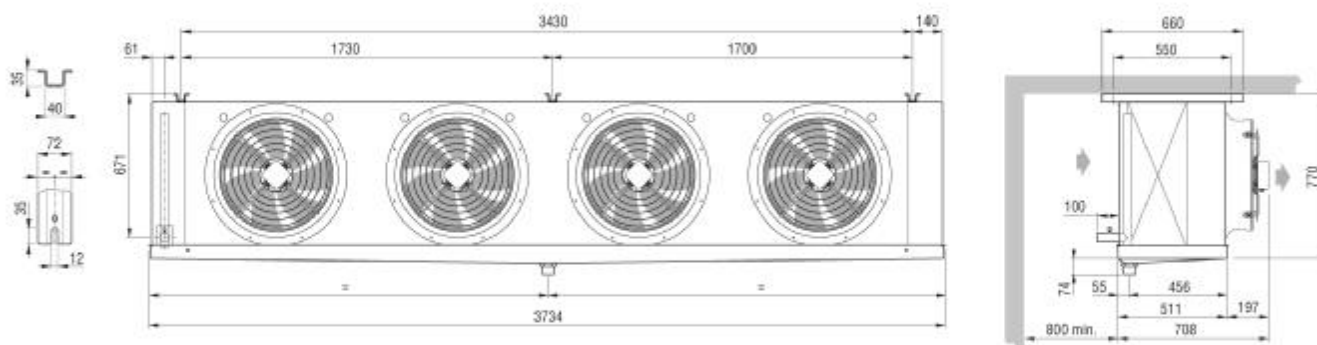

Weight	kg	274,000			
Internal surface	m2	34,20	External surface	m2	195,00
Input connection		28 mm	Output connection		54 mm
Total circuit capacity	dm3	59,40	Fin spacing	mm	6
Drain connection		2" GAS			
Defrost	ED	Electric		Watt	19800
Fan	n.	4	Diameter	mm	500
Air flow	m3/h	26980	Air throw	m	29,0
Feed	V	400/3/50	Fan speed	rpm	1390
Fan	A	7,2	Total power	Watt	3440
Tot. Pres.S.Lev. 10 m.	dB(A)	57			

N.B.: we shall not be liable for the performances and the quality of sold products, if fitted or connected to fan motor speed regulation or control systems that are different from the ones proposed or installed by us.