

User

www.frigotehnie.ro

Verification Unit cooler



vineri.17.03.2017

Air inlet temperature	°C	-18,0	Evaporating temperature	°C	-25,0
TD	°C	7,0	Refrigerant		R404A
Min number of units in room		1			

Heat exchanger	Standard	Casing	Standard
Motorfans feed	Standard	Fan motors	Standard
Defrost	Electric		

Selected model: 1 x CTE 34L8 ED

Capacity	kW	1,683			
TD	°C	7,0	Tot. air flow	m3/h	1740

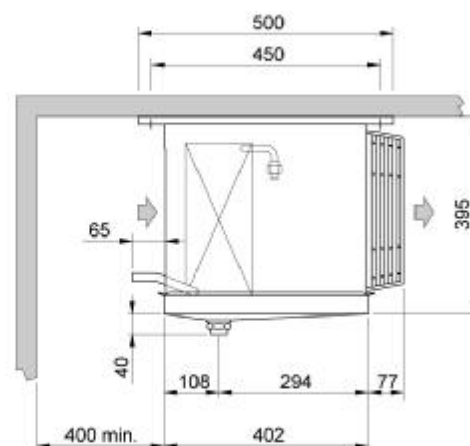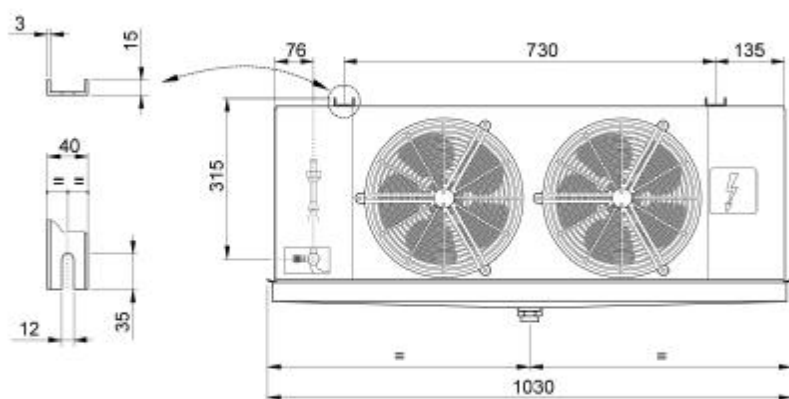

Weight	kg	23,600			
Internal surface	m2	1,41	External surface	m2	6,54
Input connection		1/2" SAE	Output connection		22 mm
Total circuit capacity	dm3	2,89	Fin spacing	mm	8.5
Drain connection		1" GAS			
Defrost	ED	Electric		Watt	1275
Fan	n.	2	Diameter	mm	250
Air flow	m3/h	1740	Air throw	m	11,0
Feed	V	230/1/50-60	Fan speed	rpm	1300
Fan	A	0,94	Total power	Watt	150
Tot. Pres.S.Lev. 10 m.	dB(A)	34			

N.B.: we shall not be liable for the performances and the quality of sold products, if fitted or connected to fan motor speed regulation or control systems that are different from the ones proposed or installed by us.