

User

www.frigotehnie.ro

Verification Unit cooler


vineri.17.03.2017

Air inlet temperature	°C	-18,0	Evaporating temperature	°C	-25,0
TD	°C	7,0	Refrigerant		R404A
Min number of units in room		1			

Heat exchanger	Standard	Casing	Standard
Motorfans feed	Standard	Fan motors	Standard
Defrost	Electric		

Selected model: 1 x CTE 352E8 ED

Capacity	kW	5,135			
TD	°C	7,0	Tot. air flow	m3/h	5250

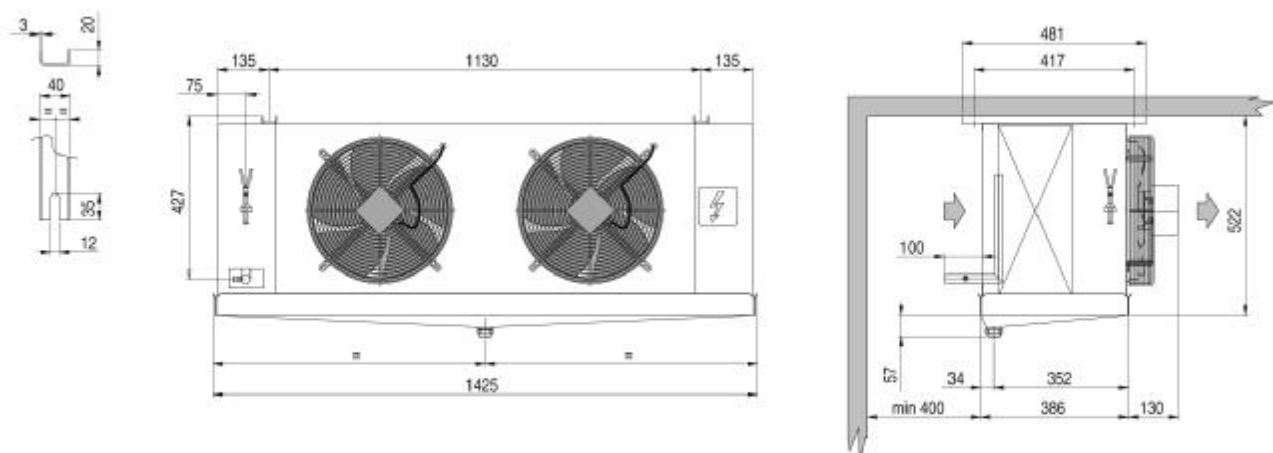

Weight	kg	48,000			
Internal surface	m2	3,69	External surface	m2	15,50
Input connection		5/8" SAE	Output connection		28 mm
Total circuit capacity	dm3	6,60	Fin spacing	mm	8.5
Drain connection		1" GAS			
Defrost	ED	Electric		Watt	3150
Fan	n.	2	Diameter	mm	350
Air flow	m3/h	5250	Air throw	m	18,0
Feed	V	230/1/50-60	Fan speed	rpm	1450
Fan	A	1,36	Total power	Watt	290
Tot. Pres.S.Lev. 10 m.	dB(A)	48			

N.B.: we shall not be liable for the performances and the quality of sold products, if fitted or connected to fan motor speed regulation or control systems that are different from the ones proposed or installed by us.