


NEK6181GK



ENGINEERING CODE
957MA51

REFRIGERANT
R-404A

POWER SUPPLY
220-240 V 50 Hz

APPLICATION
MBP

MOTOR TYPE
CSIR

STANDARD
ASHRAE

COOLING CAPACITY
650 W

EFFICIENCY
1.6 W/W



DATA

GENERAL DATA

Model	NEK6181GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1/3+
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	28.2 Ω at 25°C
Run Winding Resistance	6.1 Ω at 25°C

MECHANICAL DATA

Displacement	7.28 cm ³
Oil Charge	350 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	10.4 Kg

ELECTRICAL COMPONENTS

Start Capacitor	43-53 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Overload Protection	T0874/G6

EXTERNAL CHARACTERISTICS

Base Plate	SMALL
------------	-------

Connector	Internal Diameter	Shape	Material
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER
Process	6.1 mm	SLANTED 42°	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	MBP
Tested Standard	ASHRAE
Tested Cooling	Fan
Tested Voltage	220 V
Tested Frequency	50 Hz
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
54.4	-6.7	650	1.6	405	2.57	17.72

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE**Condensing Temperature 35°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	527	1.90	278	2.13	11.43
-15	649	2.17	298	2.18	14.18
-10	794	2.45	324	2.24	17.47
-5	966	2.75	352	2.33	21.38
0	1165	3.09	377	2.43	26.01
5	1393	3.52	396	2.55	31.43
10	1652	4.09	404	2.68	37.74

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE**Condensing Temperature 45°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	450	1.43	314	2.15	10.80
-15	553	1.64	336	2.25	13.34
-10	677	1.85	366	2.36	16.44
-5	824	2.06	401	2.48	20.17
0	996	2.29	436	2.60	24.64
5	1196	2.56	468	2.74	29.92
10	1424	2.89	493	2.88	36.10


Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE**Condensing Temperature 55°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	564	1.48	381	2.49	15.42
-5	686	1.64	419	2.63	18.92
0	830	1.80	461	2.78	23.16
5	999	1.98	504	2.92	28.23
10	1194	2.20	542	3.07	34.22

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

ENVELOPE

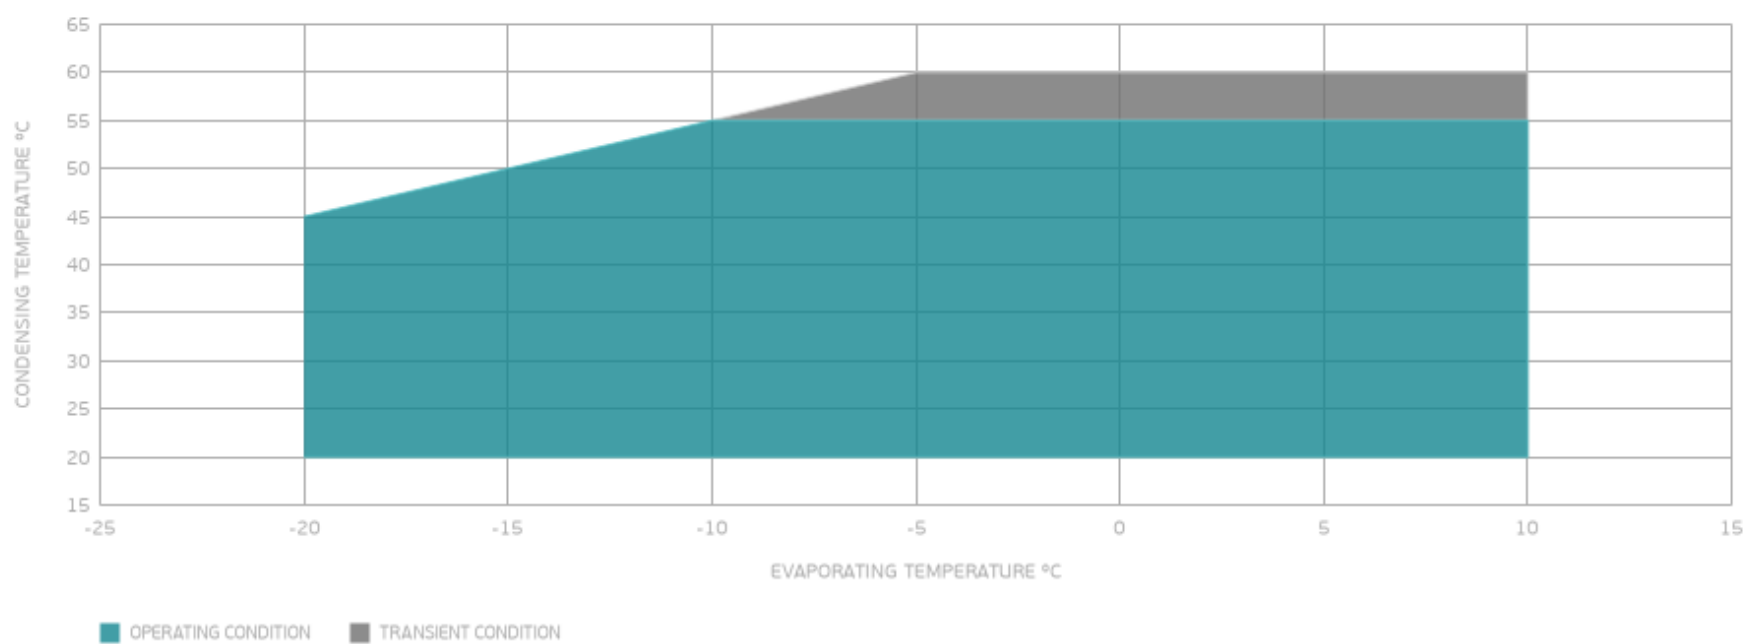

EXTERNAL DIMENSIONS

