


Input data

Refrigerant	R449A	
Reference temperature	Dew point temperature	
Calculation mode	Refrigeration / Air Cond.	
Operating mode	Subcritical	
Power supply	400/3/50	
Ambient temperature	°C	32
Liquid subcooling	K	3
Liquid temperature	°C	40,18
Evaporating temperature	°C	-10
Evaporating pressure	bar	3,61
Suction gas superheating	K	10
Useful fraction of superheating	%	100

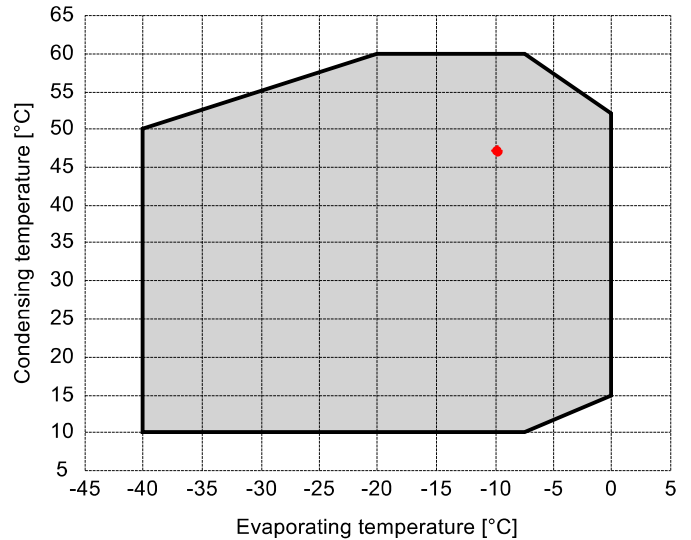

Output data

Compressor :	LB2-Q736-0Y-2T	
Number of compressors :	FSx1	
Refrigerating capacity	kW	17,09
Condensing temperature (dew point)	°C	47,37
Evaporator capacity	kW	17,09
Power input (with fan)	W	8340
Condenser capacity, theor.	kW	24,8
Current	A	14,45
COP/EER (with fan)	W/W	2,05
Mass flow	kg/h	434
Operating frequency	Hz	50
Connection	-	DOL-STAR
Operating mode	-	100%
Discharge temperature	°C	89,37
Ratio (%)	%	100,0%
Note	-	
Oil flow	l/min	-
Heat Exchanged (oil Cooler)	kW	-
Oil Temp. at Oil Cooler Outlet	°C	-
Certified by	-	Frascold

Compliant with EU Ecodesign Directive 2009/125/EC - Regulation EU 2015/1095.

Certified by:

- Frascold Data




Legend:

- *ref: At conditions according to EN12900
- Suction gas temperature = 20 °C
- Liquid subcooling = 0 K

All data subject to change without notice

P&I Diagram:

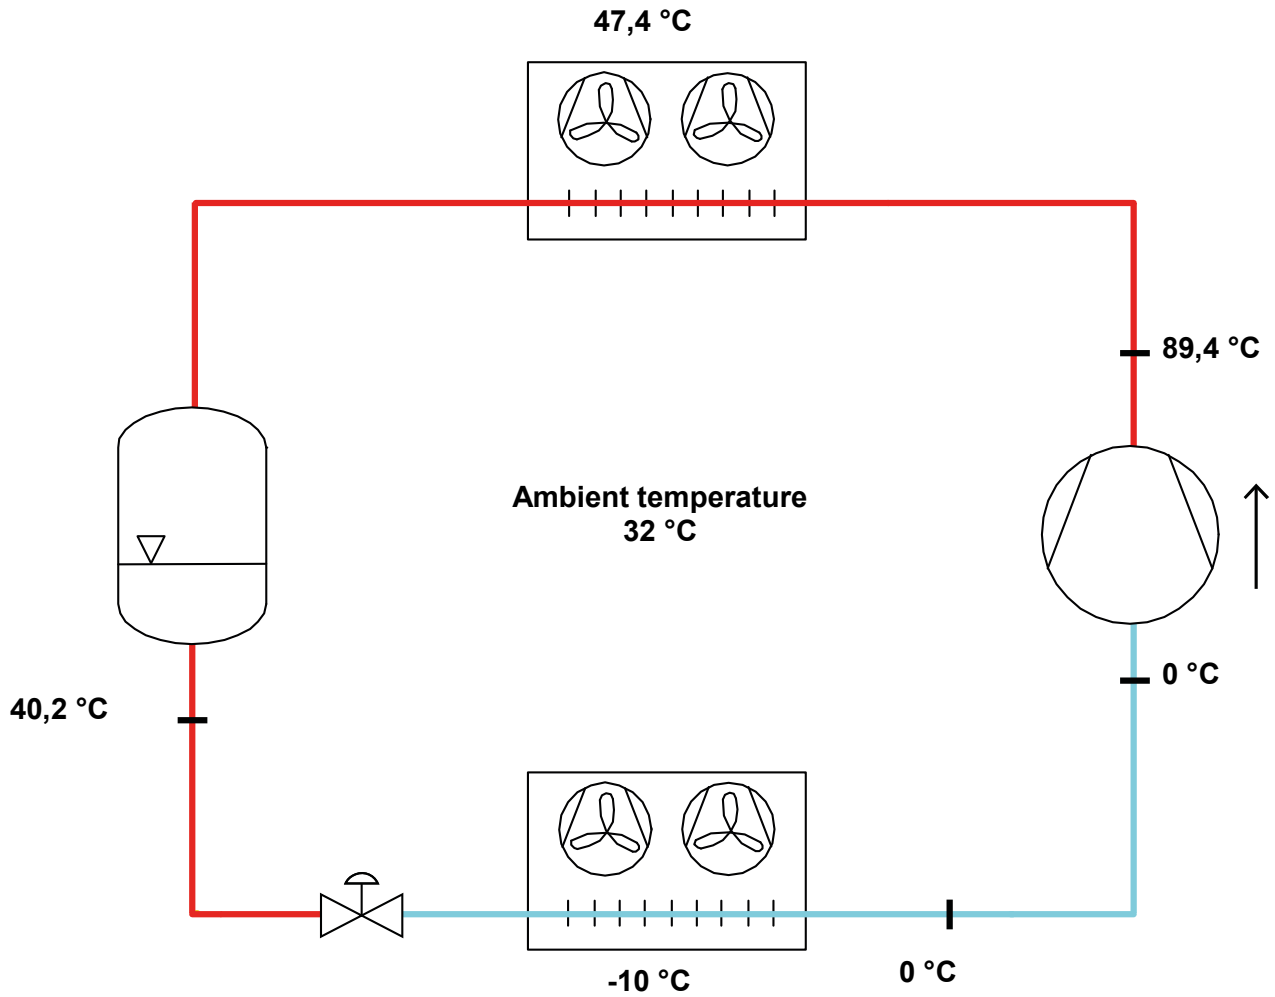

All data subject to change without notice

Model: LB2-Q736-0Y-2T

Refrigerant: R449A

Power supply: 400/3/50 DOL-STAR

Technical data:

Compressor

Compressor	Q7-36.1Y
Displacement	35,86 m³/h
Nominal compressor speed	1450 rpm
Motor voltage	400 V
Nominal operating frequency	50 Hz
Maximum allowed operating current (MRA)	19,4 A
Locked rotor current (LRA)	87,3 A
Number of pistons	4
Net weight	79 kg
Lubricant	FRASCOLD POE32
Oil charge	1,6 l
Maximum static pressure LP	20,5 bar
Maximum operating pressure HP	30 bar

Condenser

Volume	4,85 l
--------	--------

Fan motor

Number	2
Air flow	11400 m³/h
Power supply	230 - 400/3/50
Max power input (x1)	315 W
Max Current (x1) @400V	0,65 A
Max Current (x1) @230V	1,13 A

Liquid receiver

Code	USLR06-M
Volume	5,7 l


Net weight

STANDARD	168 kg
with housing	212 kg

Sound level:

*half sphere model

Motor connections:

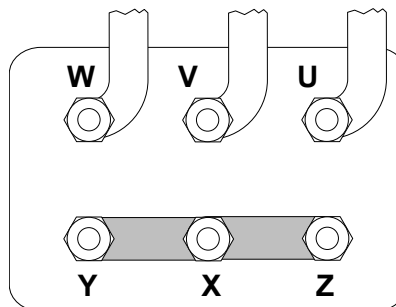




All data subject to change without notice

Model: LB2-Q736-0Y-2T

Refrigerant: R449A

Power supply: 400/3/50 DOL-STAR

Dimensions:

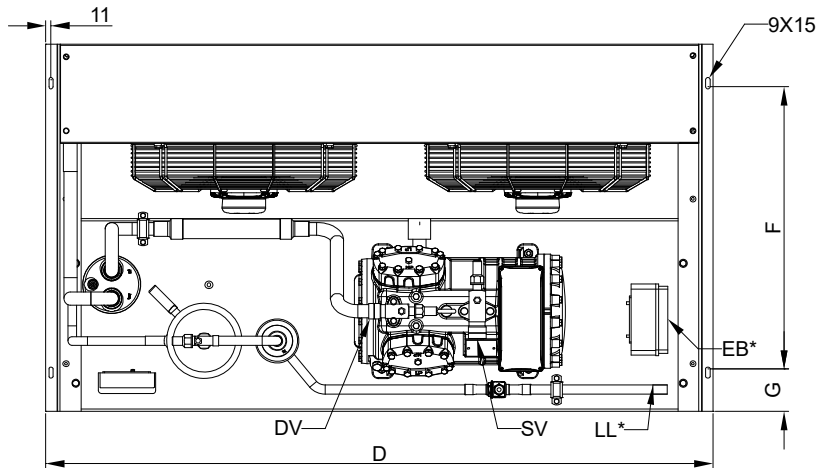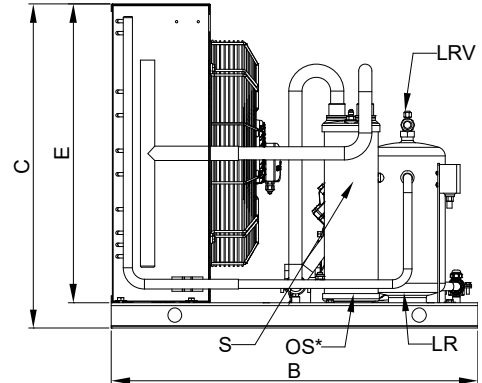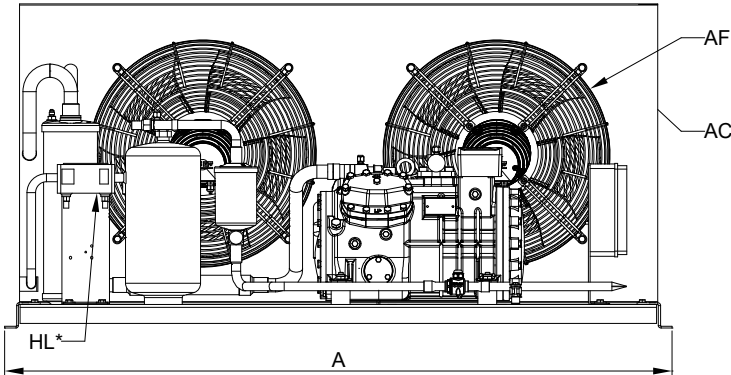

Legend:

SV: Suction Valve	35 mm - 1 3/8" in	S: Safety Valve	
LRV: Liquid valve	19 mm - 3/4" in	AC: Condenser	
A: Length	1420 mm	AF: Fan motor	AC Type
B: Width	780 mm	DV: Discharge valve	
C: Height	689 mm	LR: Liquid receiver	
A: Length (with housing)	1420 mm	OS*: Oil separator	
B: Width (with housing)	804 mm	EB*: Electric box	
C: Height (with housing)	713 mm	HL*: High/Low pressure switch	
D: Base length	1370 mm	H*: High pressure switch	
E: Condenser Height	635 mm	LL*: Liquid line	
F: Base mounting	600 mm	*Package	
G: Base mounting	80 mm		

All data subject to change without notice

Model: LB2-Q736-0Y-2T

Refrigerant: R449A

Power supply: 400/3/50 DOL-STAR

Polynomial coefficients according to EN12900 for Q7-36.1Y:

*S = T_{evap} ; D = T_{cond}

Reference conditions

Refrigerant	R449A
Ambient temperature	32 °C
Suction gas temperature	20 °C
Liquid subcooling	3 K
Frequency	50 Hz

	Refrigerating capacity [W]	Power input [W]
C1	4,573090E+004	1,368730E+003
C2	1,691980E+003	-1,635920E+002
C3	-3,984970E+002	2,143410E+002
C4	2,197410E+001	-5,084310E+000
C5	-1,334170E+001	6,577280E+000
C6	-5,258040E-001	-1,034140E+000
C7	9,595390E-002	-4,367290E-002
C8	-1,420800E-001	4,300090E-002
C9	-1,149850E-002	-2,061410E-002
C10	2,048300E-003	-2,010030E-003

$$Y = C1 + C2*S + C3*D + C4*S^2 + C5*S*D + C6*D^2 + C7*S^3 + C8*D*S^2 + C9*S*D^2 + C10*D^3$$

All data subject to change without notice

Seasonal efficiency calculation according to EU Regulation 2015/1095

Model: LB2-Q736-0Y-2T

Refrigerant: R449A



Item	Symbol	Value		Unit
Evaporating temperature	t	-10	-35	[°C]
Annual electricity consumption	Q	37450	23633	[kWh/a]
Seasonal energy performance ratio	SEPR	2,9	1,68	[-]

Parameters at full load and ambient temperature 32°C (Point A)				
Rated cooling capacity	P _A	17,685	5,33	[kW]
Rated power supply	D _A	8,31	4,208	[kW]
Rated COP	COP _A	2,13	1,27	[-]

Parameters at part load and ambient temperature 25°C (Point B)				
Declared cooling capacity	P _B	19,534	6,042	[kW]
Declared power supply	D _B	7,892	4,159	[kW]
Declared COP	COP _B	2,48	1,45	[-]

Parameters at part load and ambient temperature 15°C (Point C)				
Declared cooling capacity	P _C	22,146	7,071	[kW]
Declared power supply	D _C	7,159	4,013	[kW]
Declared COP	COP _C	3,09	1,76	[-]

Parameters at part load and ambient temperature 5°C (Point D)				
Declared cooling capacity	P _D	24,71	8,111	[kW]
Declared power supply	D _D	6,279	3,784	[kW]
Declared COP	COP _D	3,94	2,14	[-]

Parameters at full load and ambient temperature 43°C (Point 3)				
Declared cooling capacity	P ₃	14,765	4,233	[kW]
Declared power supply	D ₃	8,801	4,186	[kW]
Declared COP	COP ₃	1,68	1,01	[-]

Other Items				
Capacity control		Fixed		
Degradation coefficient for fixed and staged capacity units	Cdc	0.25		[-]
Power supply		400/3/50		
Fan speed regulation (Rated)	V	Fixed		[V]
Reference temperature		Dew point temperature		
Suction gas temperature	toh	20		[°C]
Subcooling	SC	3		[K]

Declaration of conformity - Directive 2009/125/UE Ecodesign - Condensing units LB2 series: FDEC151

All data subject to change without notice