

User

www.frigotehnie.ro

Verification Unit cooler


vineri.17.03.2017

Air inlet temperature	°C	0	Evaporating temperature	°C	-10,0
TD	°C	10,0	Refrigerant		R404A
Min number of units in room		1			

Heat exchanger	Standard	Casing	Standard
Motorfans feed	Standard	Fan motors	Standard
Defrost	Electric		

Selected model: 1 x CTE 634B6 ED

Capacity	kW	146,625			
TD	°C	10,0	Tot. air flow	m3/h	61880

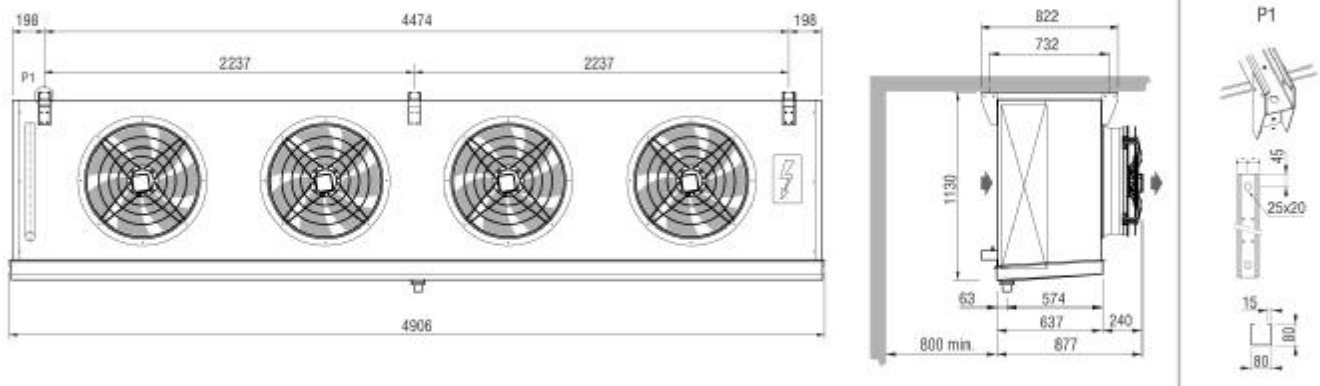

Weight	kg	480,000			
Internal surface	m2	56,00	External surface	m2	364,00
Input connection		2 x 35 mm	Output connection		2 x 54 mm
Total circuit capacity	dm3	112,00	Fin spacing	mm	6
Drain connection		2" GAS			
Defrost	ED	Electric		Watt	46800
Fan	n.	4	Diameter	mm	630
Air flow	m3/h	61880	Air throw	m	35,0
Feed	V	400/3/50	Fan speed	rpm	1400
Fan	A	14,8	Total power	Watt	7000
Tot. Pres.S.Lev. 10 m.	dB(A)	53			

N.B.: we shall not be liable for the performances and the quality of sold products, if fitted or connected to fan motor speed regulation or control systems that are different from the ones proposed or installed by us.